


●自動挿入用テーピング仕様 (2) / SPECIFICATION OF TAPING FOR AUTOMATIC INSERTION
 ・メタライズド・ポリエステル・フィルム・コンデンサ / Metallized Polyester Film Capacitors

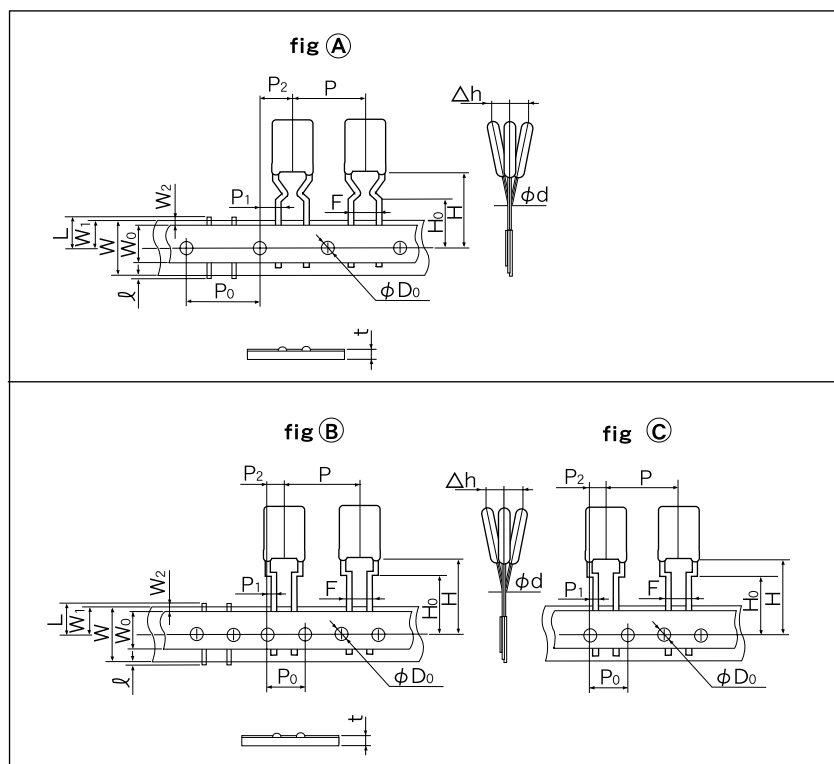

■ 1パックの梱包数
 QUANTITY OF ONE PACK

Style symbol	fig	包装単位 pcs./pack
TF	Ⓐ	1000
TL	Ⓑ	250~500
TL	Ⓒ	250~500

(mm)

Style symbol	TF	TL	TL
fig	Ⓐ	Ⓑ	Ⓒ
P	12.7 ± 1.0	25.4 ± 1.0	30.0 ± 1.0
P ₀	12.7 ± 0.2	12.7 ± 0.2	15.0 ± 0.2
P ₁	3.85 ± 0.5	3.85 ± 0.5	3.75 ± 0.5
P ₂	6.35 ± 1.0	6.35 ± 1.0	7.5 ± 1.0
F	5.0 ± $\begin{smallmatrix} 0.8 \\ 0.2 \end{smallmatrix}$	5.0 ± 0.8	7.5 ± 0.8
W	18.0 ± 0.5		
W ₀	12.5 min		
W ₁	9.0 ± 0.5		
W ₂	3.0 max		
H	20.0 ± 1.0		
H ₀	16.0 ± 0.5		
l	2.0 max		
φD ₀	4.0 ± 0.2		
Δh	0.0 ± 2.0		
t	0.7 ± 0.2		

Style symbol	TF	TL	TL	
fig	Ⓐ	Ⓑ	Ⓒ	
MMSSDC	100VDC	104~564	684~335	684~335
	250VDC	103~334	394~155	394~155
	400VDC	103~104	124~474	124~474
	630VDC	103~273	333~224	333~224
MMSSAC	63VAC	104~564	684~335	824~335
	125VAC	103~184	224~125	224~125
	200VAC	103~563	683~334	823~334
	250VAC	103~273	333~224	393~224

形状記号 Style symbol	fig	F寸法	付記コード Additional code
TL	Ⓑ	5 mm	810 (一個飛ばしテーピング) Taping that makes one space
TL	Ⓒ	7.5 mm	815 (一個飛ばしテーピング) Taping that makes one space

Style TLは付記コードを付記下さい。
 If you require style TL, Please add the additional code.