

SG160160B (160 DOTS X160 DOTS)

FEATURES

- BUILT-IN CONTROLLER (RA8835 OR EQUIVALENT)
- +5 V POWER SUPPLY
- 1/160 DUTY CYCLE
- 8-BIT PARALLEL INTERFACE

MECHANICAL DATA

ITEM	DIMENSIONS	UNIT
Module Size (W x H x T)	88.8 x 88.8 x 10.0(LED14.6)	mm
Viewing Area (W x H)	62.0 x 62.0	mm
Active Area (W x H)	60.76 x 60.76	mm
Dot Size (W x H)	0.34 x 0.34	mm
Dot Pitch (W x H)	0.38 x 0.38	mm

INTERFACE PIN CONNECTIONS

NO.	SYMBOL	LEVEL	FUNCTION
1	VSS	0V	Power Supply Ground
2	VDD	5V	Power Supply Voltage
3	Vo	-	Contrast Adjustment Voltage
4	/RD	L	Read Signal
5	/WR	L	Write Signal
6	/CS	L	Chip Signal
7	Ao	H/L	Data Type Select
8~15	DB0~DB7	H/L	Data Bus Line
16	/RES	L	Reset Signal
17	VEE	-	Power Supply Voltage For LCD
18	A	4.2V	LED Power (+)
19	K	0V	LED Power (-)
20	NC	-	No Connection


ABSOLUTE MAXIMUM RATINGS


ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage For Logic	VDD-VSS	0	-	7	V
Supply Voltage For LCD Drive	VDD-Vo	0	-	21	V
Input Voltage	Vi	VSS	-	VDD	V

ELECTRICAL CHARACTERISTICS

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	
Supply Voltage For Logic	VDD-VSS	-	4.5	5	5.5	V	
LCD Supply Voltage	VDD-Vo	VDD=5V Ta=25	17.4	18	24.3	V	
Supply Current	IDD	VDD=5V	-	14	23	mA	
Input Voltage	"HIGH" Level	V _{IH}	-	2.2	-	VDD	V
	"LOW" Level	V _{IL}	-	-	-	0.6	V
Output Voltage	"HIGH" Level	V _{OH}	-	2.4	-	-	V
	"LOW" Level	V _{OL}	-	-	-	0.4	V

EXTERNAL DIMENSIONS

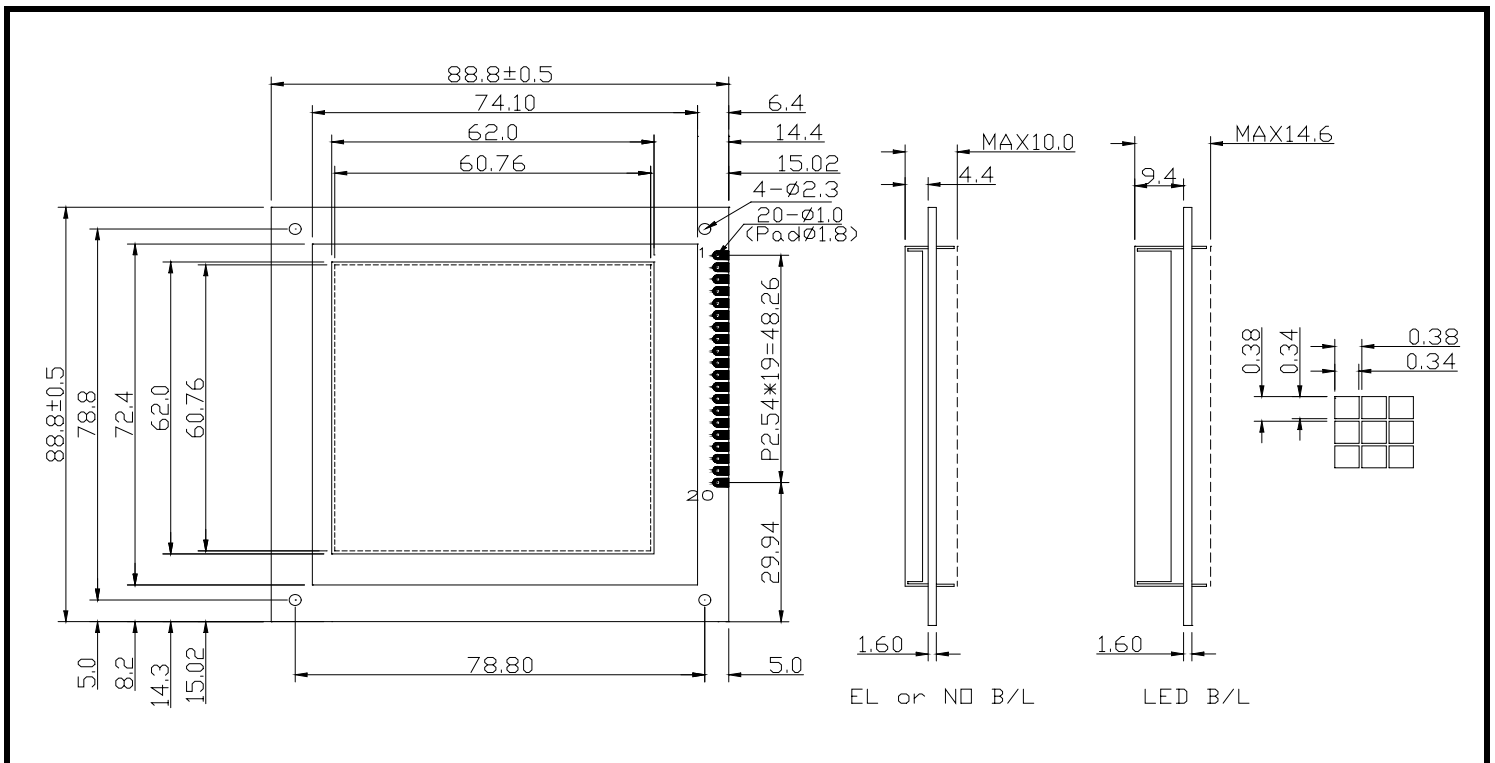




SG160160B (160 DOTS X 160 DOTS)

TIMING CHARACTERISTICS

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT.
System Cycle Time	t _{CYC}	425	-	-	ns
Address Set-up Time	t _{AW}	30	-	-	ns
Address Hold Time	t _{AH}	10	-	-	ns
Data Set-up Time	t _{DS}	120	-	-	ns
Data Hold Time	t _{DH}	10	-	-	ns
Output Disable Time	t _{OH}	10	-	50	ns
Access Time	t _{ACC}	-	-	120	ns
Enable Pulse Width	Read	t _{EW}	-	-	ns
	Write				ns

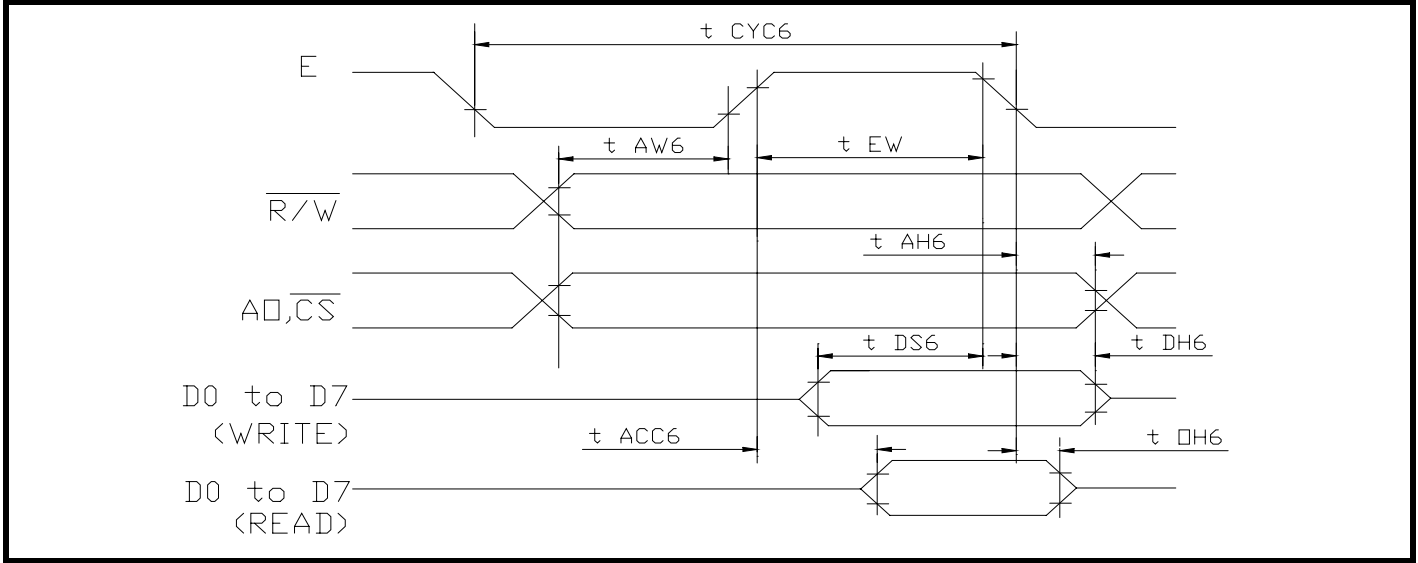

BLOCK DIAGRAM

